





CW / NW / WW

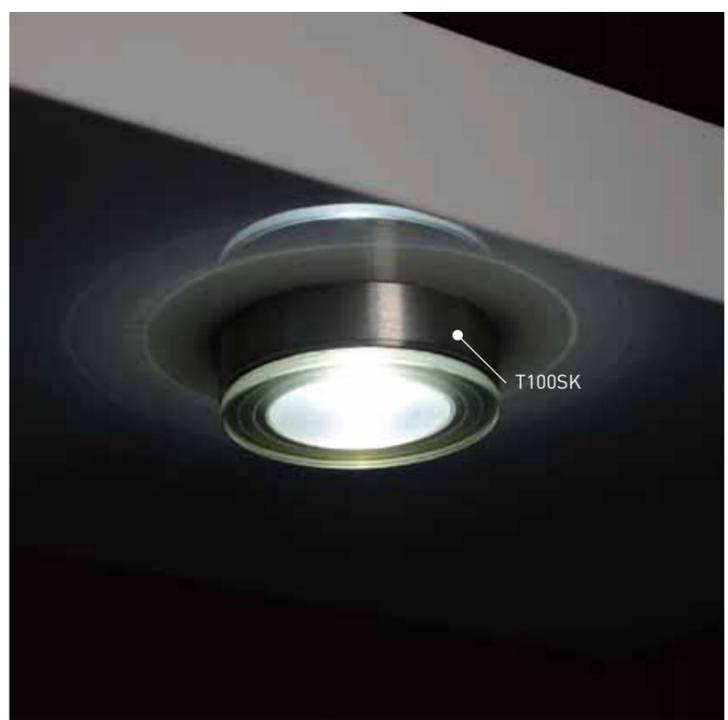

Uni-X1 LED Down Light (2.5W) | PLD108

CE IP44

- Application: damp location, bathroom, under kitchen cabinet, closet and display
- Solid aluminium housing with tempered glass surface
- With reflector & diffuser
- Compatible power supply: 700mA constant current XP LED power system

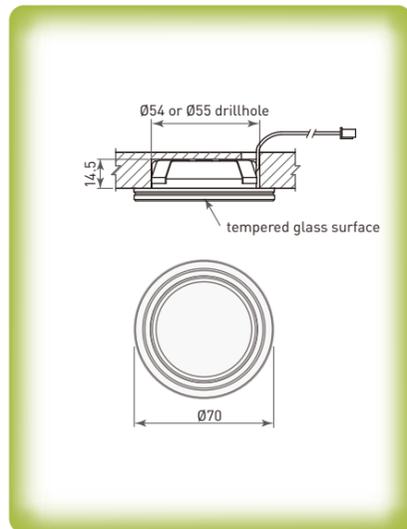

Uni-X1 LED Down Light (2.5W) | PLD108

Illustration	Article Code	Model	Description
			With reflector, diffuser & tempered glass
	09.108.422	PLD108ABN-CW	brushed stainless, cool white
	09.108.412	PLD108ABN-WW	brushed stainless, warm white
	2.22141	T100SK-ABN	brushed stainless Flat surface mount housing, aluminium, screw fixing
	2.22341	T100SKSL-ABN	brushed stainless Slope surface mount housing, aluminium, screw fixing
	231-54		Drill bit, Ø54mm Ø54mm hole, blind or through